PLAN SHOWING THE PROPOSED CONSTRUCTION OF RESIDENTIAL HOUSE IN PLOT No. 16, IN SURVEY No. 132, SITUATED AT YENUGONDA REVENUE WARD, MAHABOOBNAGAR. BELONGING TO SRI. K. SHIVA RAJ. S/O SRI. K. LAL SINGH

SCALE: 1CM = 1 MTR.

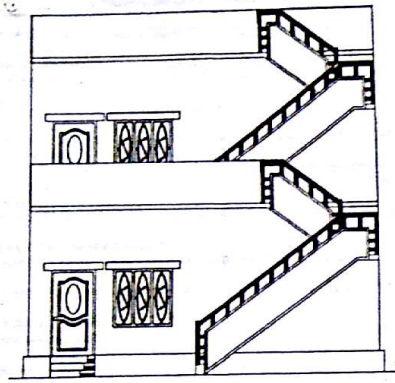

FRONT ELEVATION

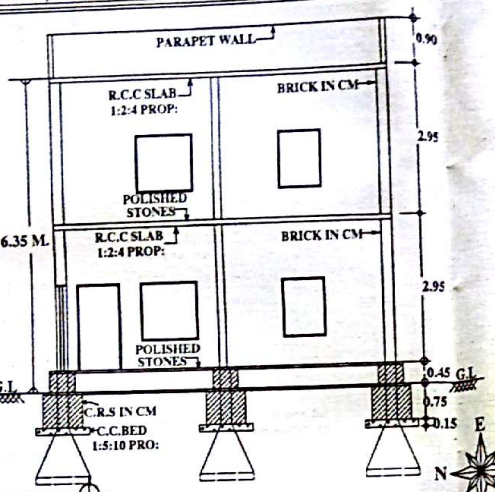

C.SECTION ON "A-B"

Plot No. 12.

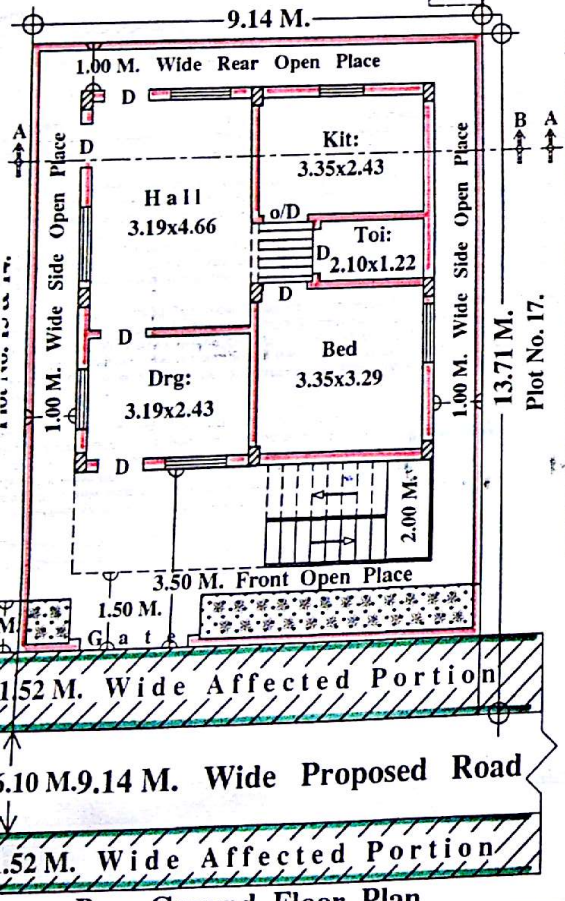

Pro: Ground Floor Plan

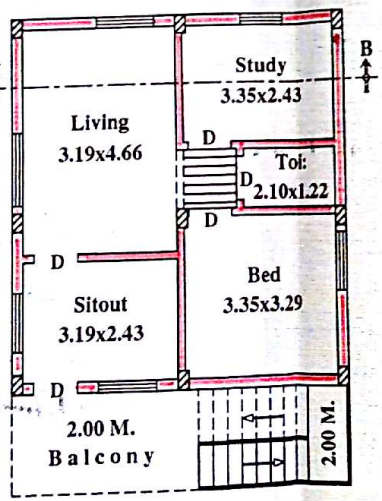

Pro: First Floor Plan

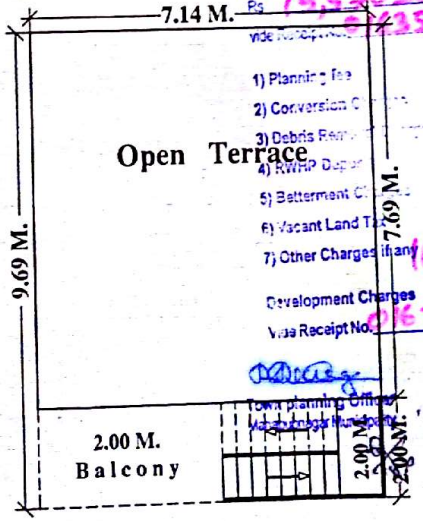

Terrace Plan

(SCALE = 1:100)

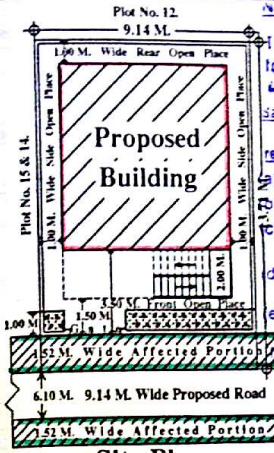

Site Plan

(Scale = 1:200)

NOTE

This is only Municipal Permission for Construction without Prejudice to any Body's Civil Right over the land. Sanction of building permission by the Sanctioning Authority shall not mean responsibility for clearance of the following aspects.

a) Title or ownership of the site or building.
b) Easement Rights.
c) Structural Drawings and structural design.
d) Workmanship, quality of structure and materials.
e) Quality, adequacy and amenities in the building.
Other aspects.
required under various legislations.

The Permission is hear by SANCTIONED as per the plan and as per the Conditions laid down in the Proceedings No. G1/BA/ 266 / 16 Dated 16 / 06 /20 16 Permission is Valid up to /20 19 Dated 15 / 06 /20 16 An Amount of Rs 15530=00 Collected towards vide Receipt No. 0163509736 Dt. 15/6/16

1) Planning Fee : Rs 5,210=00
2) Conversion Charges : Rs 1,890=00
3) Debris Removal Charges : Rs 2000=00
4) RWHP Deposit : Rs 2520=00
5) Betterment Charges : Rs
6) Vacant Land Tax : Rs 3750=00
7) Other Charges if any : Rs 200=00
Development Charges : Rs 2180=00
Vide Receipt No. 0163509736 Dt. 15/6/16

Town planning Officer
Municipality, Mahabubnagar

COMMISSIONER
Municipality, Mahabubnagar

Balakrishna Bandigi B.Tech(Civil)
Municipal Licenced Engineer
LIC No. G1/LIC-Syn/07/MBNR/2016
S.S. Gutta Road, New Town,
Mahabubnagar. Cell : 9440297514.



SECTION OF PERCULATION PIT

MASTER PLAN EXTRACT
MAHABOOBNAGAR TOWN
Approved vide G.O.M.S. No. 472, Dt. 29-10-2010.

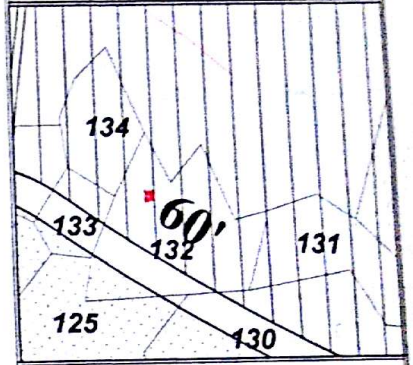

Key Plan

(Not To Scale)

SPECIFICATIONS:

BOTTOM ... C.C.BED 1:5:10 PRO:
FOUNDATION .... R.R.S IN CM.
BASEMENT .... C.R.S IN CM.
SUPERSTRUCTURE ... BRICK IN CM.
ROOFING .... R.C.C SLAB 1:2:4 PRO:
FLOORING ... POLISHED STONES.
PLASTRING ..... C.M.SMOOTH.
COLOURING .... WHITE WASH.
DOORS & WINDOWS ... C.T.WOOD.

REFERENCE

PROPOSED.	
AFFECTED PORTION	
TOTAL PLOT AREA	125.41 SQ.MTS.
AFFECTED AREA	13.89 SQ.MTS.
NET PLOT AREA	111.52 SQ.MTS.
PRO: G/F BUILT-UP AREA ...	69.18 SQ.MTS.
PRO: F/F BUILT-UP AREA ...	69.18 SQ.MTS.
TOTAL BUILT-UP AREA ...	138.36 SQ.MTS.
PRO: COMPOUND WALL	42.06 R.MTS.

APPLICANT'S SIG:
(K. Shiva Raj)

Scanned by CamScanner