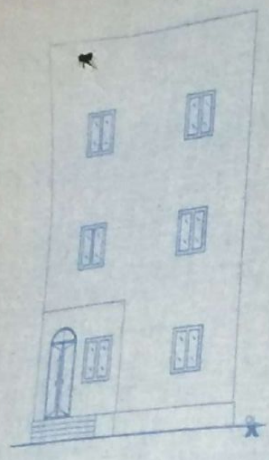

ELEVATION

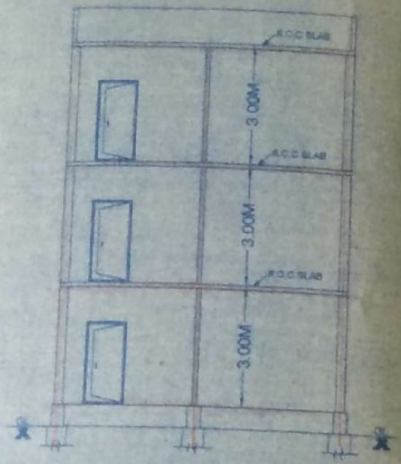

SECTION AT 'A-A'

PROPOSED GROUND FLOOR PLAN

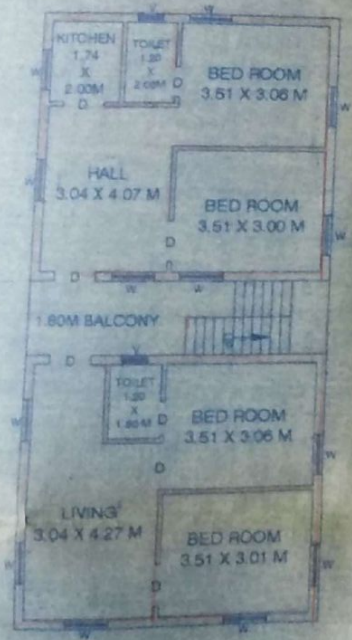

PROPOSED FIRST FLOOR PLAN



PART EXTRACT OF MASTER PLAN AT SHAMBHUNIPET, WARANGAL
SCALE : 800' TO AN INCH
APPLICAINT SITE

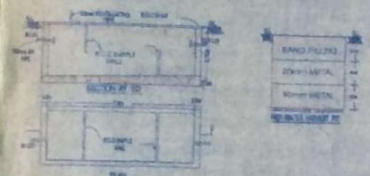

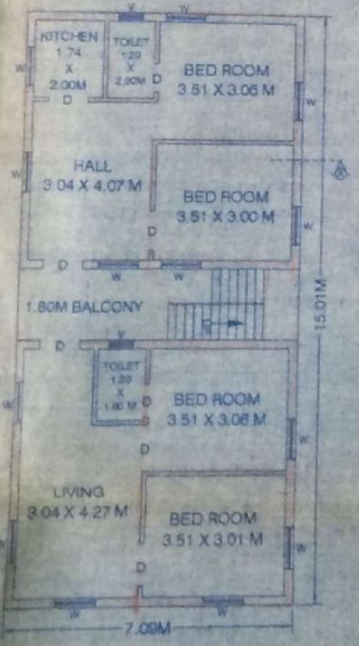

PROPOSED SECOND FLOOR PLAN

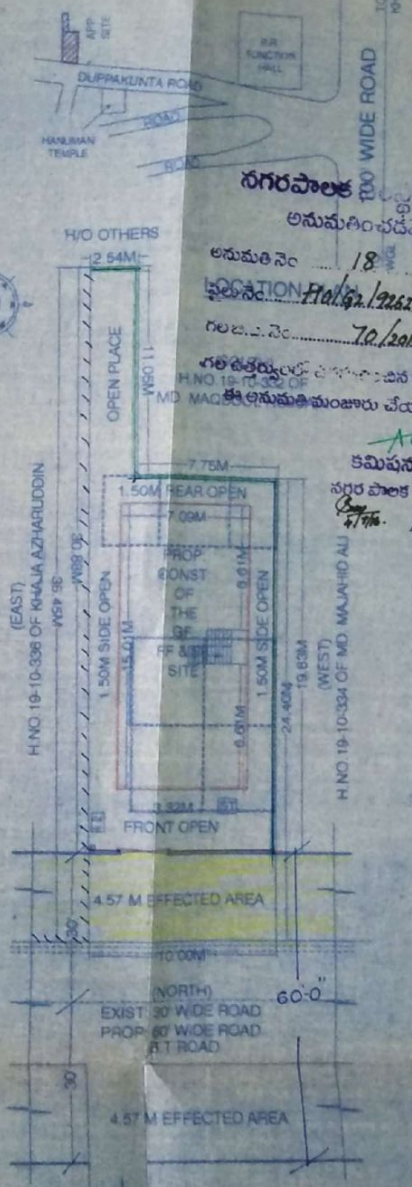

SITE PLAN
SCALE 1:200CM

K. KRISHNA MURTHY
LICENCED SURVEYOR
LIC. NO.[illegible]
PHONE [illegible]

నగరపాలక [illegible] పర
అనుమతించడమైనది.

అనుమతి నెం. 18 SCALE 1:100 CM
LOCATION Plot No. 1262/2262/2016 25-4-2016
గుర్తు నెం. 70/2015-16.

ఈ అనుమతి మంజూరు చేయడమైనది

కమిషనర్ తరపున

నగర పాలక సంస్థ, వరంగల్

PLAN SHOWING THE PROPOSED CONSTRUCTION OF GROUND FLOOR, FIRST FLOOR AND SECOND FLOOR R.C.C RESIDENTIAL BUILDING ON EXISTING OLD HOUSE TO BE REMOVED BEARING MPL.NO. 19-10-335 (NEW), 19-10-106 (OLD), 19/1039 (OLD) SITUATED SHAMBHUNIPET, WARANGAL.

BELONGING TO :

KHAJA SAYEEDUDDIN
S/o . KHAJA HASSANUDDIN.

REFERENCE		SPECIFICATION	
	PROPOSED CONSTRUCTION	FOUNDATION	C.C.(1:5:10) & ROOTING
	SITE EFFECTED BY 50' ROAD	BASEMENT	CRS IN CM
	EXIST. CONST TO BE REMOVED	SUPER STRUCTURE	BRICK IN CM
	EXIST. CONST	FLOORING	MARBLE
	MORTGAGE AREA	ROOFING	STONE
		PLASTERING	R.C.C SLAB WITH CM

AREA STATEMENT

TOTAL PLOT AREA	265.88 SQ.MTS.
EFFECTED AREA	45.70 SQ.MTS.
NET TOTAL AREA	220.18 SQ.MTS.
G F PLINTH AREA (NCL. BALCONY & STAIR CASE)	106.42 SQ.MTS.
F F PLINTH AREA (NCL. BALCONY & STAIR CASE)	106.42 SQ.MTS.
S F PLINTH AREA (NCL. BALCONY & STAIR CASE)	106.42 SQ.MTS.
OPEN AREA	113.76 SQ.MTS.
COMPOUND WALL	10.00 R.MTS.

REQUIRED MORTGAGE AREA	81.92 SQ.MTS.
PROVIDED IN GROUND FLOOR	34.80 SQ.MTS.

Sayeed

OWNER SIGN

TPO SIGN

Scanned by CamScanner